

RECOMMEND P.C.B LAYOUT

■ MATERIAL

HOUSING: NYLON 6T+GF 30% UL94V-0
 CONTACT: PHOSPHOR BRONZE
 SHELL : BRASS
 PLATING: NICKEL UNDER PLATING OVER ALL, GOLD ON CONTACT AREA,
 TIN/LEAF ON SOLDER TAIL

■ ELECTRICAL


CURRENT RATING: 1 AMP.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC MIN.
 INSULATION RESISTANCE: 50D MEGOHMS MIN.
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.

■ ENVIRONMENTAL

TEMPERATURE RANGE: -45°C TO 105°C.

■ PART NO.

TEMPERATURE RANGE: -45°C TO 105°C.

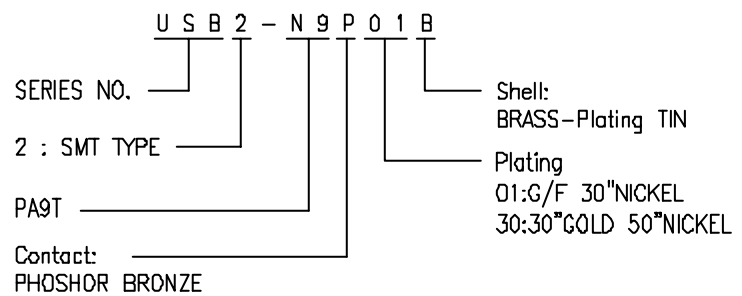

				TOLERANCE		啟賢興業股份有限公司 KEMAX KE MAX SHING CO., LTD.		TITLE: USB				
				LINEAR	ANGLES			PART NO. USB2-N9P01B				
				X.±0.40	X'±	APPD:	MAT'L:	DWG NO. USB07001				
				.X±0.30	.X'±	CHKD:	FINISH:		UNITS	SCALE	SHEET	REV
				.XX±0.20	.XX'±	DRWN: Lance	Q'TY:		MM	1 : 1	1 OF 1	A
REV	ECN NO.	NAME	DATE	.XXX±0.10	.XXX'±							